

Hertenlaan - Coepelduyn nov 2020

Captured: Nov 06, 2020, Processed: Dec 08, 2020



Map Details Summary ⓘ


Project Name	Hertenlaan - Coepelduyn nov 2020
Photogrammetry Engine	DroneDeploy Proprietary
Date Of Capture	Nov 06, 2020
Date Processed	Dec 08, 2020
Processing Mode	Standard
GSD Orthomosaic (GSD DEM)	0.63in/px (DEM 2.50in/px)
Area Bounds (Coverage)	50364706.61ft ² (30%)
Image Sensors	Hasselblad - L1D-20c

Quality & Accuracy Summary ⓘ

Image Quality	High texture images
Median Shutter Speed	1/200
Processing Mode	[Standard Mode - Designed to produce the best photogrammetry output based on the input imagery. Include predominantly nadir imagery for most efficient mapping of large fields and crops, natural open terrain, and generating topographical maps. Entirely nadir collects are not recommended for reconstructing the sides of buildings, overhangs, or complex equipment. Include horizontal and oblique imagery to optimize processing for high resolution 3D reconstruction of buildings, pipework & conveyors.]
Images Uploaded (Aligned %)	2988 (100%)
Camera Optimization	0.01% variation from reference intrinsics


Preview ⓘ



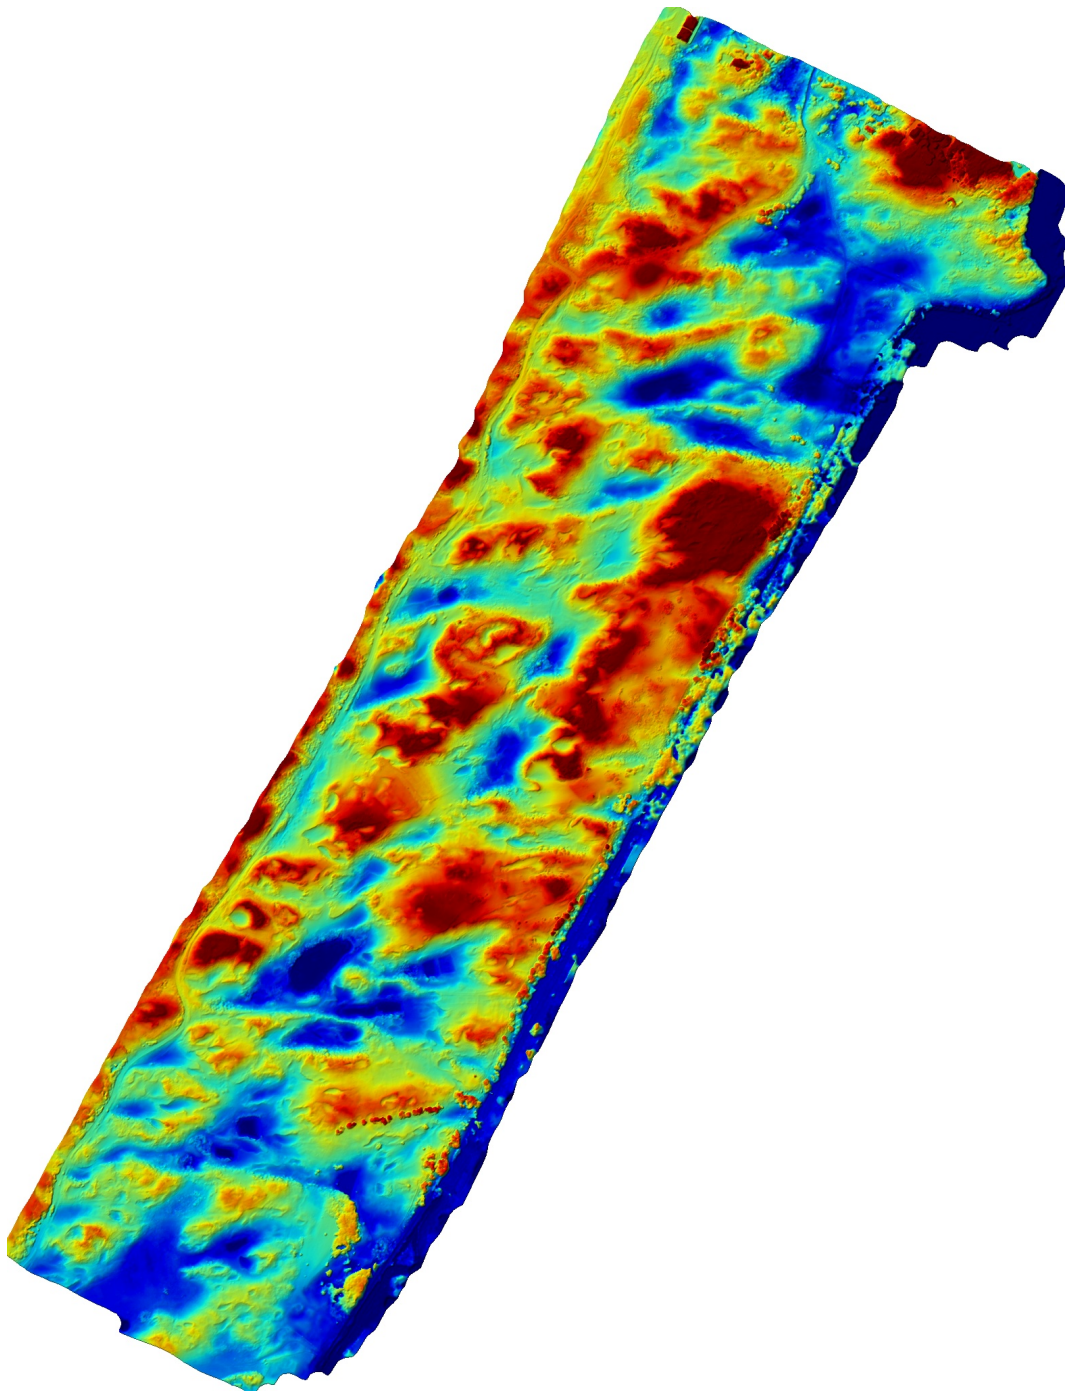

Dataset Quality Review ⓘ

Orthomosaic Coverage ⓘ

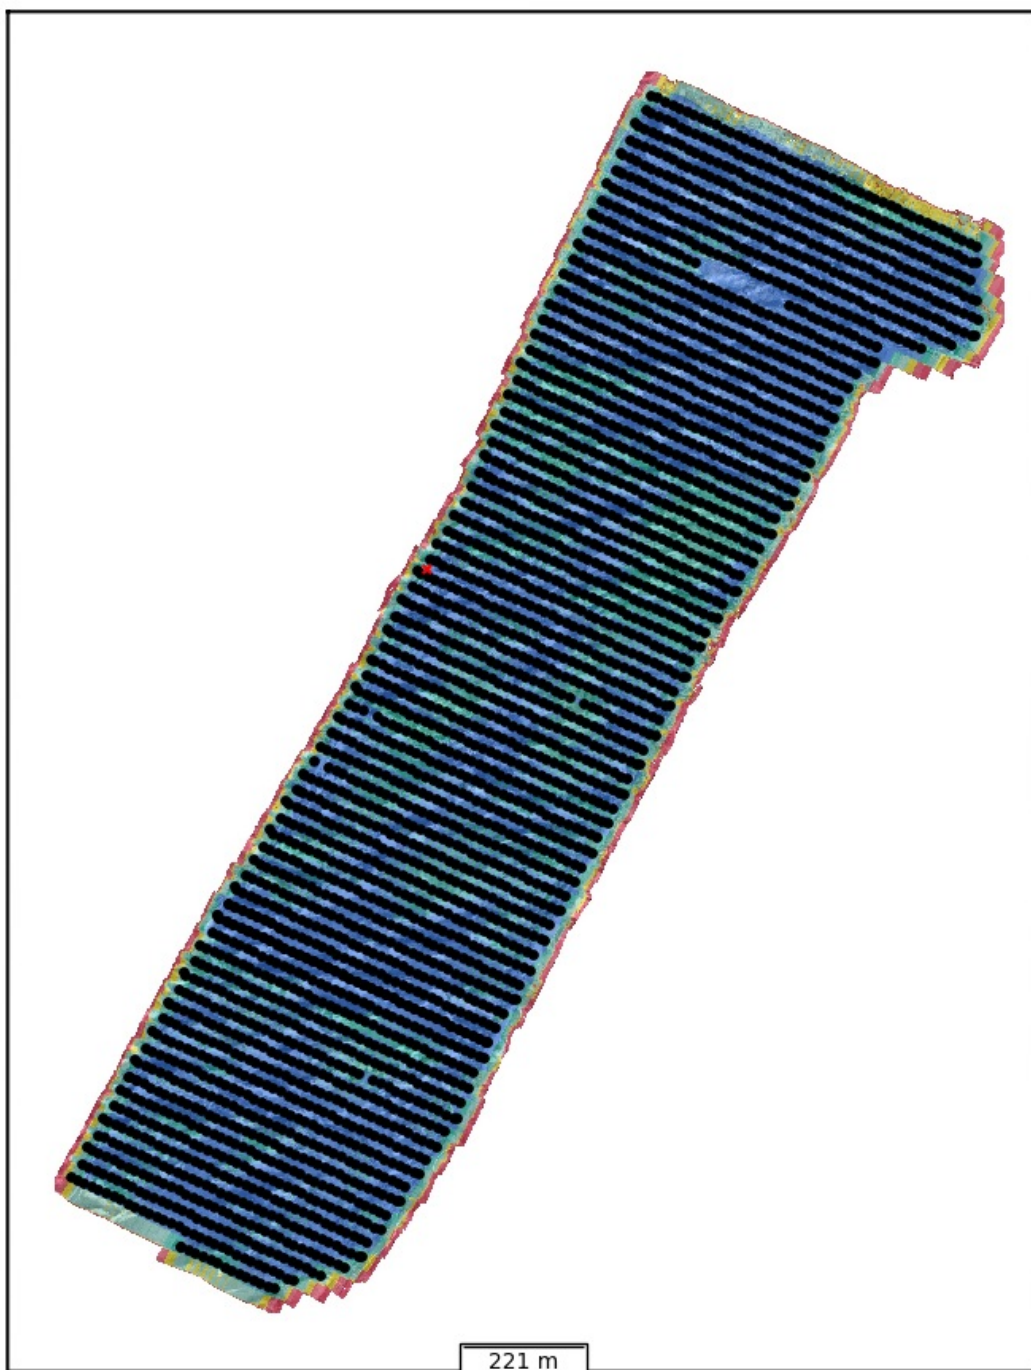

— ROI
● Aligned
✖ Unaligned




Insufficient coverage, expect large holes in the map, and low accuracy.

Marginal coverage, expect distortion or holes on buildings or sharp edges, and lower accuracy measurements.

Good coverage, expect a high quality reconstruction

Sensor(s) Used		Hasselblad - L1D-20c
Image Count (by sensor)		2988
Image Resolution		5472x3648 (~20MP)
Orthomosaic coverage (% of area of interest)		30.90
Average Orthomosaic Image Density within Structured Area		10 images/pixel
Median Shutter Speed		1/200


Structure from Motion ⓘ

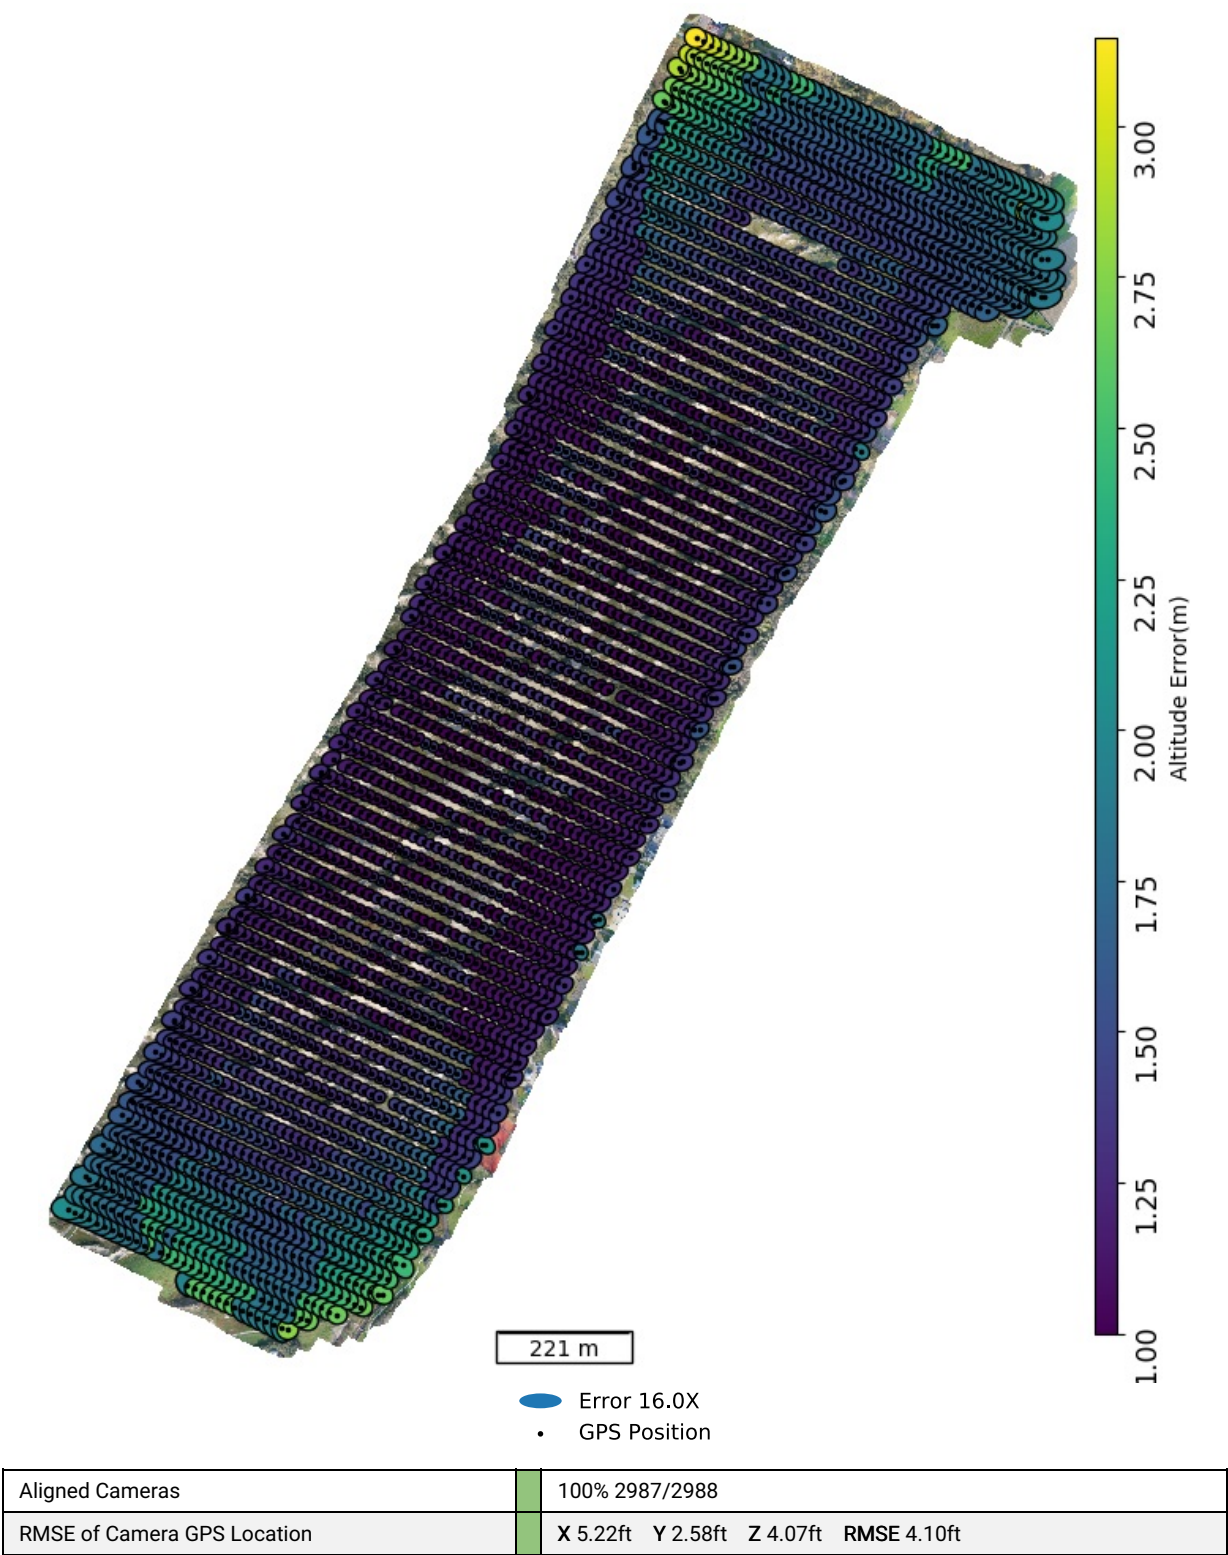


Camera Calibration ⓘ

Camera Optimization	0.01% variation from reference intrinsics
---------------------	---

Hasselblad - L1D-20c

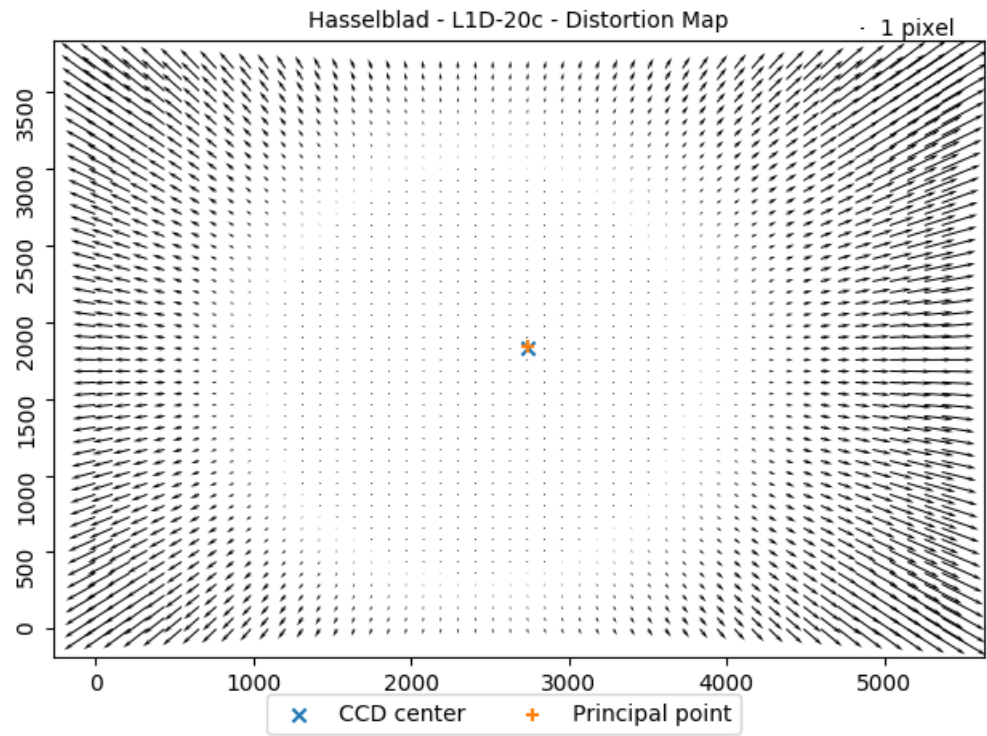

	Fx	Cx	Cy	k1	k2	k3	p1	p2
Value	4377.8	2739.49	1842.5	0.00291545	0.0383089	-0.0426753	0.000301893	0.000577185
Error	0.292062	0.0248032	0.020283	0.15729	0.63867	0.782496	0.00690362	0.00951788

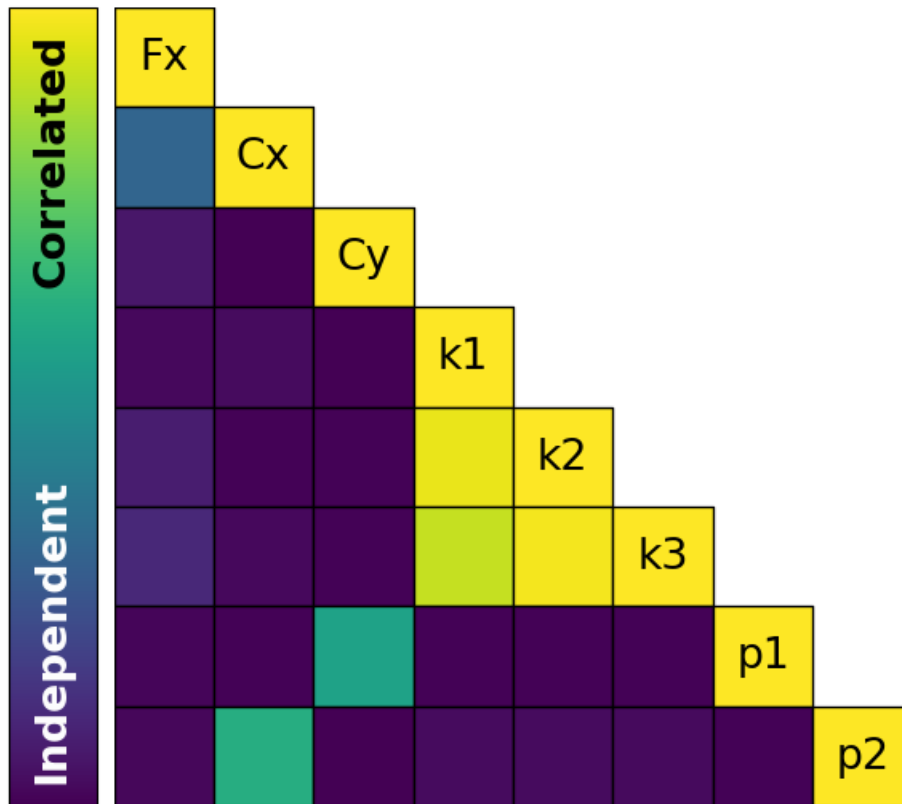


Densification and Meshing ⓘ

Processing Mode		[Standard Mode - Designed to produce the best photogrammetry output based on the input imagery. Include predominantly nadir imagery for most efficient mapping of large fields and crops, natural open terrain, and generating topographical maps. Entirely nadir collects are not recommended for reconstructing the sides of buildings, overhangs, or complex equipment. Include horizontal and oblique imagery to optimize processing for high resolution 3D reconstruction of buildings, pipework & conveyors.]
Processing Mode Quality		High
Nadir Images		100% Include oblique or horizontal images to improve reconstructions of man-made structures.
Oblique images		0%
Horizontal images		0%
Total Points		44.6 million
Point Cloud Density		2.87 points/ft ²
Mesh Triangles		4.0 million

Digital Elevation Model ⓘ

Mode	Generated from Mesh
DEM GSD	DEM 2.50in/px
Relative/Absolute	Absolute Altitude

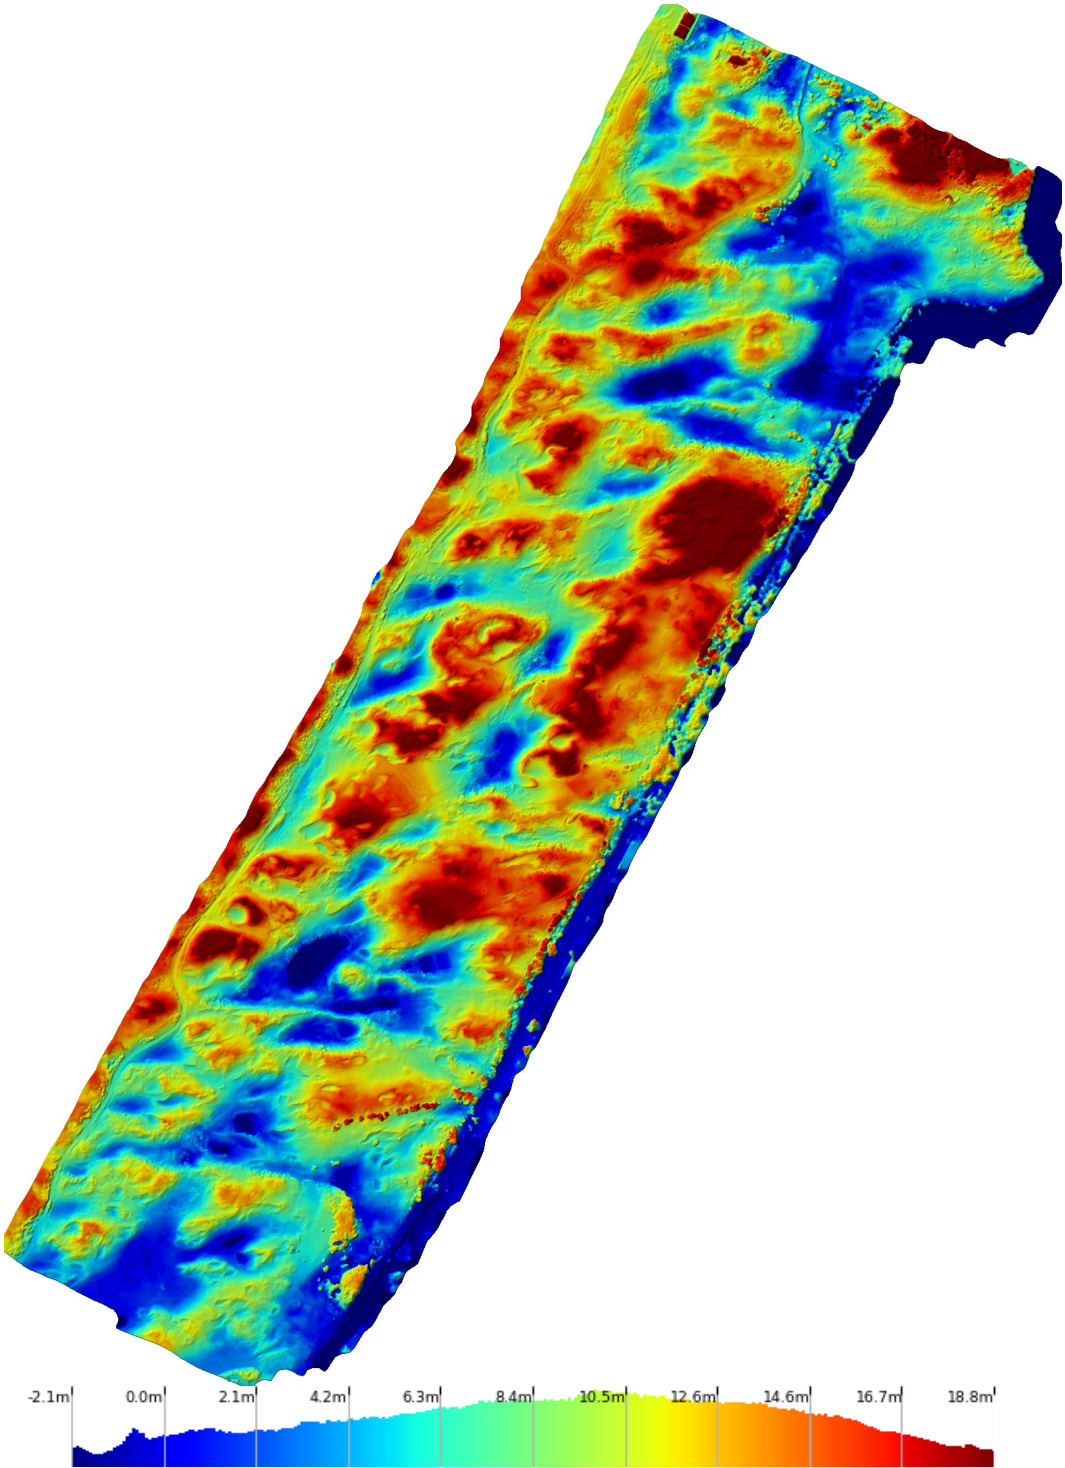



DroneDeploy

This map and report was produced with proprietary cloud photogrammetry software from DroneDeploy. [Provide feedback to improve this report](#)